



7 Cu. Ft. Electric Dryer

Dryer

Available Products: FLVE700CAW

Available Colors: White

Version: 10/25

Product Specifications

Dryer

| | |
|-----------------|------------------------|
| Drum Material | Aluminized Alloy Steel |
| Lint Filter | Yes |
| Moisture Sensor | Yes |

Dryer Options

| | |
|--------------|-----|
| Child Lock | Yes |
| Drum Light | Yes |
| Wrinkle Care | Yes |

Dryness Level

| | |
|----------|-----|
| Normal | Yes |
| More Dry | Yes |
| Less | Yes |

Exterior

| | |
|-----------------|-----|
| Reversible Door | Yes |
|-----------------|-----|

Electrical Specifications

| | |
|----------------|-------|
| Voltage Rating | 240 V |
|----------------|-------|

Installation

| | |
|---------------------|--------|
| Power Cord Included | Yes |
| Ventilation Type | Vented |

Safety Certifications and Approvals

| | |
|------------|-----|
| CSA Listed | Yes |
| UL Listed | Yes |

Dryer Cycles

| | |
|-----------------|-----|
| Cycle Count | 8 |
| Air Fluff | Yes |
| Bulky | Yes |
| Delicates | Yes |
| Fast Dry | Yes |
| Heavy Duty | Yes |
| Normal | Yes |
| Permanent Press | Yes |
| Timed Dry Time | Yes |

Drying Temperatures

| | |
|---------|-----|
| Low | Yes |
| Medium | Yes |
| High | Yes |
| No Heat | Yes |

Controls

| | |
|---------------------|-----|
| Child Lock | Yes |
| Cycle Status Lights | Yes |
| Pause Function | Yes |
| Power On/Off | Yes |
| Start | Yes |

Dimensions and Volume

| | |
|--------------------------|-----------|
| Height | 43 1/10" |
| Width | 27" |
| Depth | 30 1/10" |
| Depth With Door 90° Open | 50" |
| Dryer Drum Capacity | 7 Cu. Ft. |

Energy Data

| | |
|------------------------------|---------|
| Combined Energy Factor (CEF) | 3.73 |
| kWh/year | 641 kWh |

General Specifications

| | |
|----------------------|--------|
| Chime On / Chime Off | Yes |
| Prop 65 Label | Yes |
| Warranty - Labor | 1 Year |
| Warranty - Parts | 1 Year |

Installation Diagram


Installation in a Recess or Closet

- 1 A dryer installed in a bedroom, bathroom, recess or closet, MUST be exhausted outdoors.
- 2 No other fuel burning appliance shall be installed in the same closet as the gas dryer.
- 3 Your dryer needs the space around it for proper ventilation.

DO NOT install your dryer in a closet with a solid door.

- 4 Closet door ventilation required: A minimum of 120 square inches (774.2 cm^2) of opening, equally divided at the top and bottom of the door, is required. Openings should be located 3 inches (7.6 cm) from bottom and top of door. Openings are required to be unobstructed when a door is installed. A louvered door with equivalent air openings for the full length of the door is acceptable.

Dryer Dimensions

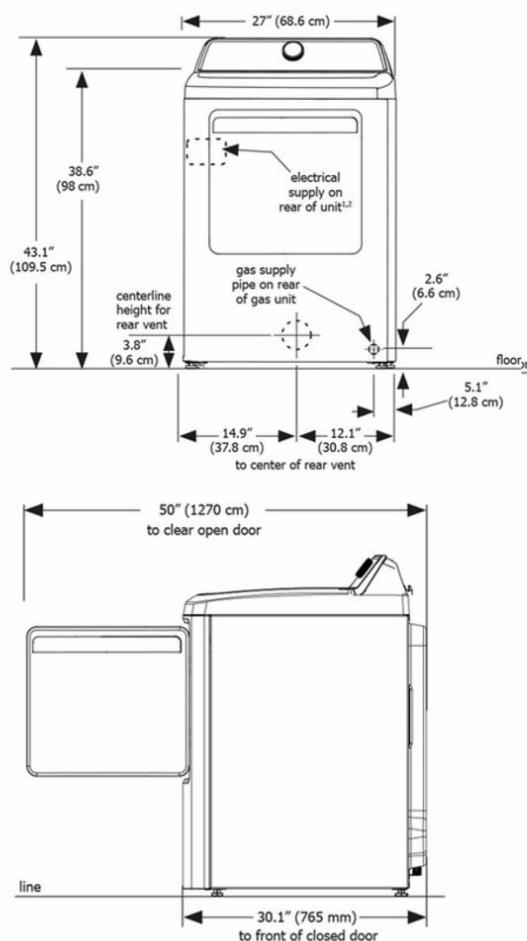

| MINIMUM INSTALLATION CLEARANCES - Inches (cm) | | | | |
|---|-------------|--------------|-------------|-------------|
| | SIDES | REAR | TOP | FRONT |
| Alcove | 1" (2.5 cm) | 6" (15.2 cm) | 24" (61 cm) | n/a |
| Closet | 1" (2.5 cm) | 6" (15.2 cm) | 24" (61 cm) | 2" (5.1 cm) |

